

LPG pressure REDUCERS


MODEL AT13 ANTARTIC



The new Tomasetto LPG pressure reducer, model AT13 Antartic, is a new article developed with the specific aim to replace the present model Artic. The Antartic model is a single stage reducer for sequential injection systems, designed with a new concept to increase the range of power and permit exceptional performances. Like model AT09, it is equipped with solenoid valve and integrated filter unit, to reduce overall costs and to permit easier and faster installation. Available starting from the end of 2011, this new reducer will represent a new success of our R&D Department

MAINTENANCE KIT: RGAT2097

FILTER MAINTENANCE KIT: RGAT2070

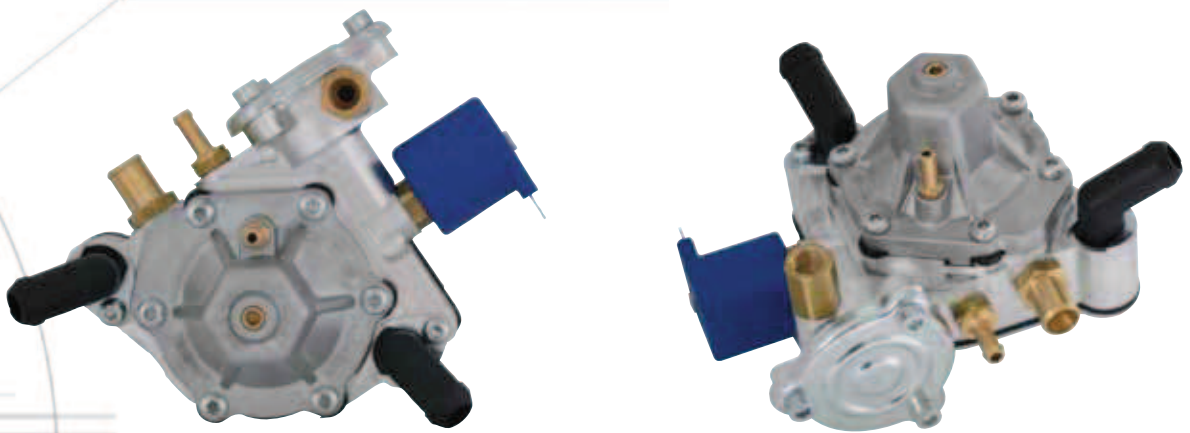

TECHNICAL DATA

Material	Die-casting Aluminium body, CNC machined
Weight	1,4 kg
Dimensions (mm)	140x160x110 mm
Max inlet pressure	3 MPa
Outlet pressure	from 0,1 to 0,25 MPa
Coil voltage	12 V DC
Coil power	17 W
Inlet connection	M12x1 / pipe Ø 8 mm
Outlet connection	Fixed fitting Ø 12 mm
Engine power	from 90 kW to 285 kW*
LPG flow rate	from 25 kg/h to 80 kg/h*

* in ideal condition